


# Y系列合金型 (1A-5A)

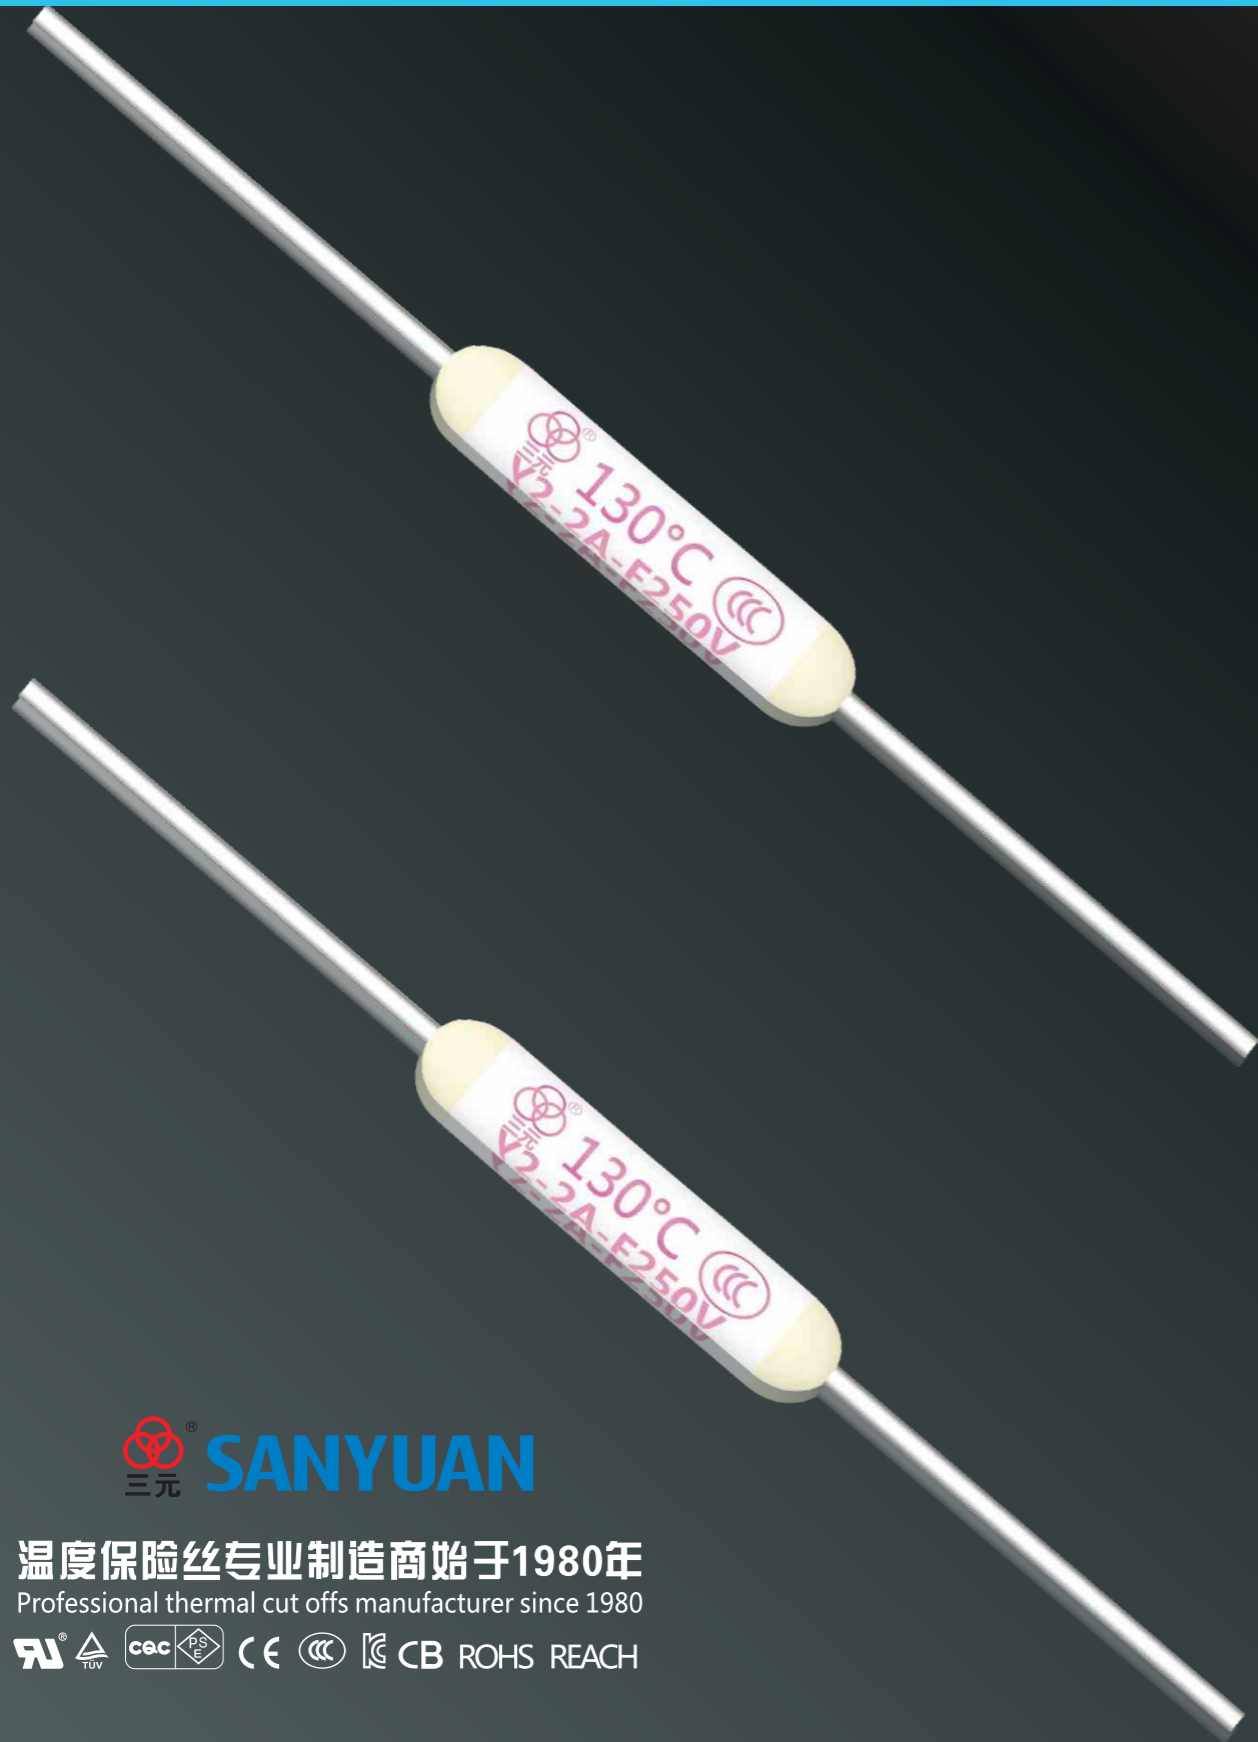


**SANYUAN**

温度保险丝专业制造商始于1980年  
Professional thermal cut offs manufacturer since 1980

UL TUV CEC PS E CE CCC CB ROHS REACH

## 外观和外形尺寸(mm)

系列	a	b	c	d	e
Y-1A	6.5±0.5	38.0±3.0	Φ0.50±0.05	Φ2.1±0.1	2.4 or below
Y	9.0±0.5	38.0±3.0	Φ0.50±0.05	Φ2.5±0.1	3.0 or below
Y-3A	10.0±0.5	38.0±3.0	Φ0.60±0.05	Φ3.0±0.1	3.3 or below
Y-5A	11.5±0.5	38.0±3.0	Φ0.60±0.05	Φ3.3±0.2	3.6 or below

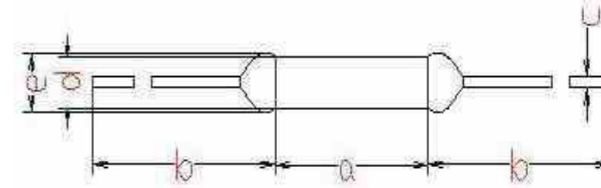

## 主要技术参数

### Y系列

型号	额定动温度(Tf)	实测动作温度	保持温度(Th)	极限温度(Tm)	额定电流(A)	额定电压(Vac)	通过认证							
							UL	CB	CCC	CE	CCC	CCC	CCC	CCC
Y0	86°C	82±2°C	66°C	200°C	2	250	●	●	●	●	●	●	●	○
Y1	95°C	90±3°C	75°C	200°C	2	250	●	●	●	●	●	●	●	○
Y2	102°C	98±3°C	82°C	200°C	2	250	●	●	●	●	●	●	●	○
Y3	115°C	112±3°C	95°C	200°C	2	250	●	●	●	●	●	●	●	○
Y4	125°C	120±3°C	105°C	200°C	2	250	●	●	●	●	●	●	●	○
Y5	130°C	126±2°C	110°C	200°C	2	250	●	●	●	●	●	●	●	○
Y6	135°C	131±3°C	115°C	200°C	2	250	●	●	●	●	●	●	●	○
Y7	145°C	140±2°C	125°C	200°C	2	250	●	●	●	●	●	●	●	○
Y8	150°C	145±3°C	130°C	200°C	2	250	●	●	●	●	●	●	●	○

### Y-1A系列

型号	额定动温度(Tf)	实测动作温度	保持温度(Th)	极限温度(Tm)	额定电流(A)	额定电压(Vac)	通过认证							
							UL	CB	CCC	CE	CCC	CCC	CCC	CCC
Y0-1A	86°C	82±2°C	66°C	200°C	1	250	●	●	●	●	●	●	●	○
Y1-1A	95°C	90±3°C	75°C	200°C	1	250	●	●	●	●	●	●	●	○
Y2-1A	102°C	98±3°C	82°C	200°C	1	250	●	●	●	●	●	●	●	○
Y3-1A	115°C	112±3°C	95°C	200°C	1	250	●	●	●	●	●	●	●	○
Y4-1A	125°C	120±3°C	105°C	200°C	1	250	●	●	●	●	●	●	●	○
Y5-1A	130°C	126±2°C	110°C	200°C	1	250	●	●	●	●	●	●	●	○
Y6-1A	135°C	131±3°C	115°C	200°C	1	250	●	●	●	●	●	●	●	○
Y7-1A	145°C	140±2°C	125°C	200°C	1	250	●	●	●	●	●	●	●	○
Y8-1A	150°C	145±3°C	130°C	200°C	1	250	●	●	●	●	●	●	●	○

### Y-3A系列

型号	额定动温度(Tf)	实测动作温度	保持温度(Th)	极限温度(Tm)	额定电流(A)	额定电压(Vac)	通过认证							
							UL	CB	CCC	CE	CCC	CCC	CCC	CCC
Y0-3A	86°C	82±2°C	66°C	200°C	3	250	●	●	●	●	●	●	●	○
Y1-3A	95°C	90±3°C	75°C	200°C	3	250	●	●	●	●	●	●	●	○
Y2-3A	102°C	98±3°C	82°C	200°C	3	250	●	●	●	●	●	●	●	○
Y3-3A	115°C	112±3°C	95°C	200°C	3	250	●	●	●	●	●	●	●	○
Y4-3A	125°C	120±3°C	105°C	200°C	3	250	●	●	●	●	●	●	●	○
Y5-3A	130°C	126±2°C	110°C	200°C	3	250	●	●	●	●	●	●	●	○
Y6-3A	135°C	131±3°C	115°C	200°C	3	250	●	●	●	●	●	●	●	○
Y7-3A	145°C	140±2°C	125°C	200°C	3	250	●	●	●	●	●	●	●	○
Y8-3A	150°C	145±3°C	130°C	200°C	3	250	●	●	●	●	●	●	●	○

### Y-5A系列

型号	额定动温度(Tf)	实测动作温度	保持温度(Th)	极限温度(Tm)	额定电流(A)	额定电压(Vac)	通过认证							
							UL	CB	CCC	CE	CCC	CCC	CCC	CCC
Y0-5A	86°C	82±2°C	66°C	200°C	5	250	●	●	●	●	●	●	●	○
Y1-5A	95°C	90±3°C	75°C	200°C	5	250	●	●	●	●	●	●	●	○
Y2-5A	102°C	98±3°C	82°C	200°C	5	250	●	●	●	●	●	●	●	○
Y3-5A	115°C	112±3°C	95°C	200°C	5	250	●	●	●	●	●	●	●	○
Y4-5A	125°C	120±3°C	105°C	200°C	5	250	●	●	●	●	●	●	●	○
Y5-5A	130°C	126±2°C	110°C	200°C	5	250	●	●	●	●	●	●	●	○
Y6-5A	135°C	131±3°C	115°C	200°C	5	250	●	●	●	●	●	●	●	○
Y7-5A	145°C	140±2°C	125°C	200°C	5	250	●	●	●	●	●	●	●	○
Y8-5A	150°C	145±3°C	130°C	200°C	5	250	●	●	●	●	●	●	●	○

注“●”表示已通过认证，“○”表示计划中